

Product No.	Size (Inch)	I.D. x O.D. (mm.)	Use Pressure (Bar)		Weight (Kg)	Length (m.)	Minimum bend radius (mm.)	Packaging	Color
			50℃	70℃					
TFS-25	1	25x33	-1 ~ 4	-1 ~ 3	30	50	100	Bobbin style	Neutral transparent with green lines
TFS-32	1-1/4	32x41	-1 ~ 3	-1 ~ 2	34	40	130	Film packing	
TFS-38	1-1/2	38x48	-1 ~ 3	-1 ~ 2	43	40	150		
TFS-50	2	50x62	-1 ~ 3	-1 ~ 2	66	40	200		
TFS-63	2-1/2	63x80	-1 ~ 2	-1 ~ 1	56	20	250		
TFS-75	3	75x92	-1 ~ 2	-1 ~ 1	60	20	310		
TFS-100	4	100x118	-1 ~ 2	-1 ~ 1	44	10	410		



TOYOFOODS-S

Muti-Purpose Food Grade Suction Hose


TFS Types

Recommended : Toyoconnector (Nut Fastening Couplings) and W-Safety Clamp with Nipple

Product No.	I.D.	O.D.	TOYOCONNECTOR (Nut fastening couplings)							A clamp-type TOYOCONNECTOR		Fastening couplings	
			Screw type					Ferrule	Arm	Ferrule	Arm	Ferrule	
			Brass	Brass	SUS	Brass and plastic	SUS	SUS	SUS	SUS	SUS	SUS	
													
			TC3-B	TC6-B	TC6-S	TC3-PB	TCSB	TC3-F	TC3-CS	TC6-F	TC6-CS	HF	
TFS-25	25	33	●			●	●	●	●				●
TFS-32	32	41		●	●					●			
TFS-38	38	48		●	●					●	●		●
TFS-50	50	62		●	●					●	●		●
TFS-63	63	80											
TFS-75	75	92											
TFS-100	100	118											

Recommended : KAMLOK

Product No.	I.D.	O.D.	KAMLOK COUPLER HOSE SHANK			TWINLOK COUPLER HOSE SHANK			KAMLOK ADAPTER HOSE SHANK		
			Aluminum	SUS	PP	Aluminum	SUS	PP	Aluminum	SUS	PP
											
			633C AL	633C SST	633C PP	633CL AL	633CL SST	633CL PP	633E AL	633E SST	633E PP
TFS-25	25	33	●	●	●	●	●	●	●	●	●
TFS-32	32	41	●	●		●	●		●	●	
TFS-38	38	48	●	●	●	●	●	●	●	●	●
TFS-50	50	62	●	●	●	●	●	●	●	●	●
TFS-63	63	80	●	●		●	●		●	●	
TFS-75	75	92	●	●	●	●	●		●	●	●
TFS-100	100	118	●	●		●	●		●	●	

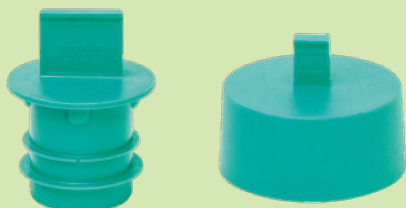

Accessories

Toyocap TYP IIa: TYP S