


TOYOTOP

Supply & Drainage of Water

TP Types

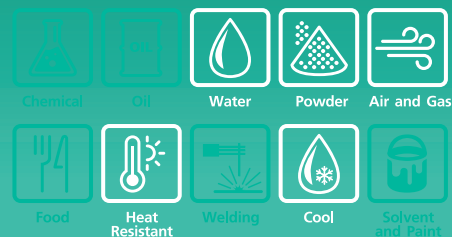

Hose Material :

HARD PVC

Hose reinforcement :

HARD PVC

Vacuum OK

RoHS2

-10°C to 50°C

Hose Feature

- Wide variety of applications Braided suction type hose that can be used both as a vacuum and to withstand pressure.
- Enhance work efficiency is transparent and highly flexible making it easy to handle.

Feature

Can use without problem

Probably usable

Easy disposal	•	
Insulating	•	
High pressure resistance	•	
Vacuum feed		•
Pressure feed		•

Technical Data

Product No.	Size (Inch)	I.D. x O.D. (mm.)	Use Pressure (Bar)	Bursting Pressure (Bar)	Weight/Roll (Kg)	Length (m.)	Minimum bend radius (mm.)	Packaging	Color
* TP025-50	1	25.4x34.2	-1 ~ 5	18	19	50	90	P.P. Bale	Transparent with Yellow Reinforcement
* TP032-50	1-1/4	31.8x41.6	-1 ~ 5	18	23	50	120		
* TP038-50	1-1/2	38.1x50.2	-1 ~ 5	18	29	50	150		
TP050-50	2	50.8x64.5	-1 ~ 5	18	48	50	210		
TP063-50	2-1/2	63.5x80	-1 ~ 5	17	71	50	270		
TP075-40	3	75.5x93.3	-1 ~ 5	17	73	40	380		
TP100-20	4	101.1x119	-1 ~ 5	15	50	20	550		
TP125-20	5	126x152	-1 ~ 5	15	83	20	650		
TP150-10	6	152.4x183.5	-1 ~ 5	13	59	10	800		
TP200-10	8	203.2x238	-1 ~ 3.5	12	87	10	1,500		
* Orange									

Specialized Clamp for TOYOTOP Hose R-POWER BAND



SY-37
SY-42



RP-38 3/8
RP-63 1/2



RP-50-S 2
RP-200-S 8

Product No.	Size (Inch)	Strapping Distance (mm.)	Product No.	Size (Inch)	Strapping Distance (mm.)
SY-37	1-1/4	32-44	RP-50-S	2	48-58
SY-42	1-1/2	44-55	RP-63-S	2-1/2	60-73
RP-38	1-1/2	44-55	RP-75-S	3	70-85
RP-50	2	48-58	RP-100-S	4	93-110
RP-63	2-1/2	60-73	RP-125-S	5	125-143
			RP-150-S	6	150-167
			RP-200-S	8	200